

Since 1936

COLUMBIA

www.columbiaboiler.com

COLUMBIA

Boiler Company

CT SERIES

- **Vertical, Tubeless, 3 Pass Design**
- **150 PSI Steam Boiler (15 and 250 psi also available)**
- **6 to 50 BHP**
- **201 to 1680 MBTU/hr.**
- **Extra Large Steam Capacity**
- **Submerged Water Cooled Furnace (First in the Industry)**
- **High Efficiency Low-High-Low and Modulating Burners Available**
- **Low Emission Burners Available**




Since 1936

You can do BETTER with Columbia

GOOD people. BETTER Boilers. BEST value.




COLUMBIA ADVANTAGES

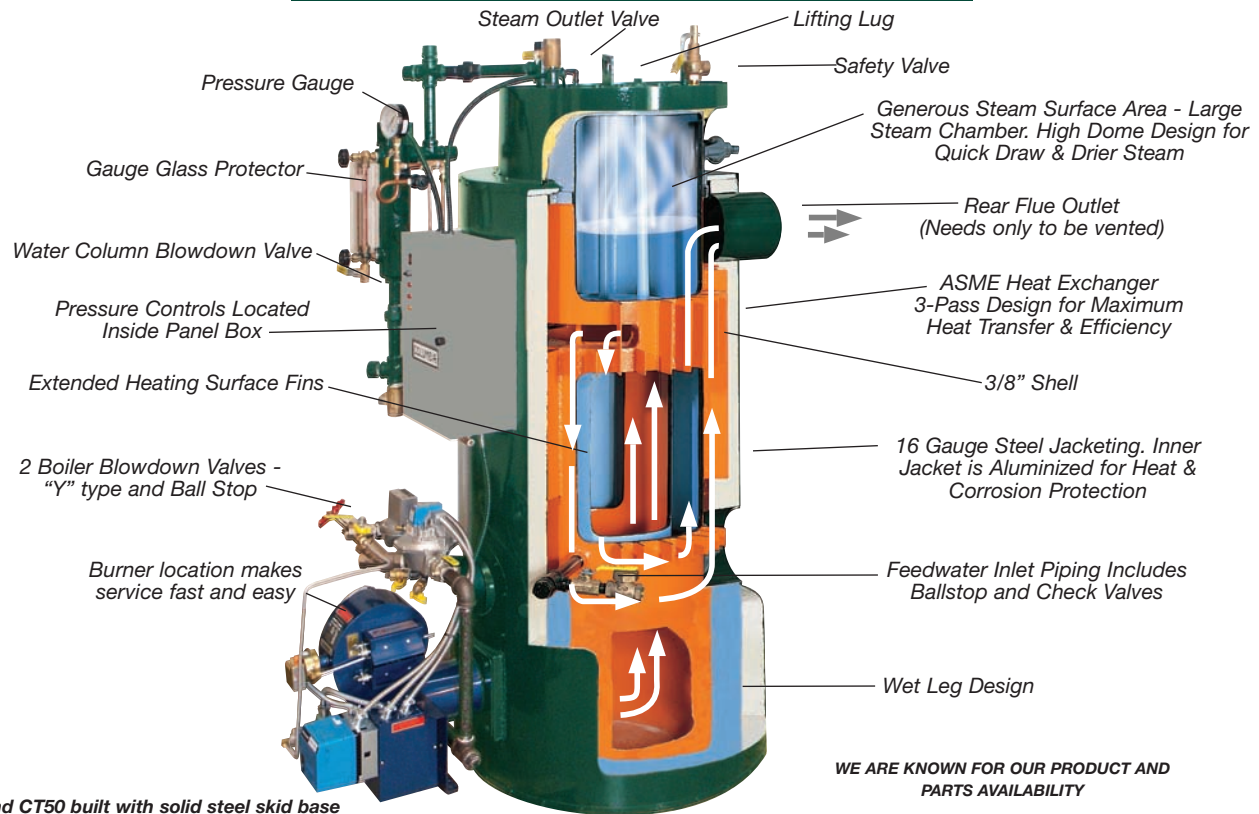

WE ARE KNOWN FOR OUR PRODUCT AND PARTS AVAILABILITY

CT35 and CT50 built with solid steel skid base

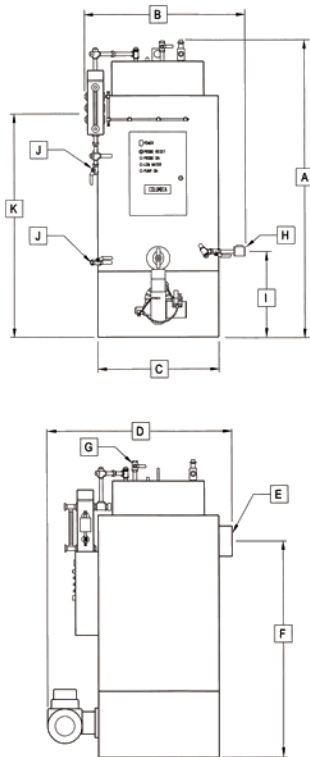

CT SPECIFICATIONS AND DATA

MODEL NO	CT-6	CT-10	CT-15	CT-20	CT-25	CT-35*	CT-50*
RATINGS:							
Horsepower	6	9.5	15	20	25	35	50
Gas Input (BTU per hour)	252,000	399,000	630,000	840,000	1,050,000	1,470,000	2,100,000
Oil Input (Gals. per hour)	2.00	2.85	4.50	6.00	7.50	10.50	15.00
Output (BTU per hour)	201,600	320,000	504,000	672,000	840,000	1,176,000	1,680,000
Output (Lbs. steam per hour)	207	320	517	690	862	1207	1725
Maximum Allowable Working Pressure	150	150	150	150	150	150	150
Water Capacity (Gals.)	16	52	70	86.5	110	90	240
Steam Release Surface Area	183 sq in	389 sq in	389 sq in	501 sq in	627 sq in	817 sq in	1402 sq in
Hand Hole Sizes	(3) 3x4	(3) 3x3-3/4	(3) 3x3-3/4	(4) 3x3-3/4	(4) 3x3-3/4	(4) 3x3-3/4	(4) 3x3-3/4
BOILER DIMENSIONS:							
A Boiler Height (includes piping)	70"	63"	80"	82"	90"	96"	103"
B Boiler Diameter (left to right, packaged including M & M)	34"	36"	36"	39"	42"	43"	56"
C Boiler Diameter (left to right, less trim & piping)	27"	34"	34"	37"	40"	43"	56"
D Burner to Flue Outlet (approx.)	47"	58"	58"	59-1/2"	64"	71"	94"
E Flue Outlet (diameter)	6"	6"	8"	8"	10"	12"	12"
F Flue Outlet to Floor (centerline)	48-1/4"	40-1/4"	56-1/4"	57-1/4"	61-5/8"	69"	76-1/4"
G Steam Outlet (IPS)	3/4"	1"	1"	1"	1-1/4"	1-1/4"	2"
H Feedwater Inlet (IPS)	1/2"	1/2"	1/2"	3/4"	3/4"	3/4"	1"
I Feedwater Inlet to Floor (centerline)	22-3/8"	9-1/4"	9-1/4"	11-1/4"	11-3/4"	13-1/2"	15-1/2"
J Blowdown Outlet (IPS)	1"	1"	1"	1"	1"	1"	1-1/4"
K Normal Water Line to Floor	46-3/4"	42"	59"	68"	71-1/2"	81-1/2"	
Approx. Floor Space	3' x 5'	3.25'x5.5'	3.25'x5.5'	3.25'x5.5'	4' x 6'	5' x 8'	6' x 10'
CRATED DIMENSIONS:							
Left to Right	38"	41-1/2"	41-1/2"	44"	44"	45-1/2"	56"
Front to Rear	53"	67"	67"	72"	72"	77"	96"
Height	73"	86"	86"	95"	95"	95"	104"
Approx. Shipping Wt. (skidded & crated)	1580 lb	1900 lb	2500 lb	3150 lb	3450 lb	4650 lb	6200 lb

CT BOILER/BURNER UNITS: Completely assembled, piped, wired & factory tested with steam pressure gauge, water level gauge, gauge cocks with ball checks, gauge glass protector, steam safety valve, steam supply ball valve, boiler and water column blowdown valves, hand hole inspection plate assemblies, feedwater inlet ball valve & check valve, jacket and 3" poured refractory insulation, water column with probe type low water cut-off and pump control, additional probe type low water cut-off with manual reset, steam pressure control, steam hi-limit pressure control with manual reset, feed pump motor contactor, and UL listed burner with safety and operating controls. CSD-1 approval is standard on all boilers.
 * CT35 and CT50 are built on a solid steel skid base.

CT35 skid base 45" x 48-1/2" CT50 skid base 56" x 66" (WxL)



MADE IN THE USA

Manufactured in USA by
COLUMBIA BOILER COMPANY
 P.O. Box 1070, Pottstown, PA 19464
 (610) 323-2700 FAX (610) 323-7292
 www.columbiaboiler.com
 cbcsales@columbiaboiler.com

