

# THERMOCOIL COIL TUBE THERMAL FLUID HEATER



**Thermogenics Inc.**  
6 Scanlon Court, Aurora, ON, Canada, L4G 7B2  
Tel: 905.727.1901 Fax: 905.727.7456  
[www.thermogenics.com](http://www.thermogenics.com)

**Thermogenics USA**  
4426 Mt Carmel Tobasco Road, Suite A  
Cincinnati, OH, 45244  
Tel: 513.528.0500 Fax: 513.528.0592  
[www.thermogenics.com](http://www.thermogenics.com)

## SAFETY

- Thermogenics coil tube heaters can be used for unattended operation in specific jurisdiction.

## CAPACITY

- Thermal Fluid applications from 2.51 mmBTU/hr to 20.08 mmBTU/hr (up to 750°F).

## FUEL EFFICIENCY

- Up to 82% efficiency.
- Double walled boiler shell preheats combustion air and cools outer casing, thereby minimizing radiation losses.

## PRESSURE SPECIFICATIONS

- Standard up to 250 psig (higher on request).

## CODE

- ASME, NATIONAL BOARD or as specified. Complies with local code requirements as applicable.
- ASME BPVC SECTION I, CSA B51.

## FUELS


- Natural Gas
- Number 2 Oil
- Propane
- Combination of any of the above

## COMPACT SIZE

- Compact size and low weight for reduced installation and engineering cost.

## ENVIRONMENTAL

- Compliance with current noise and NOx emissions regulations.

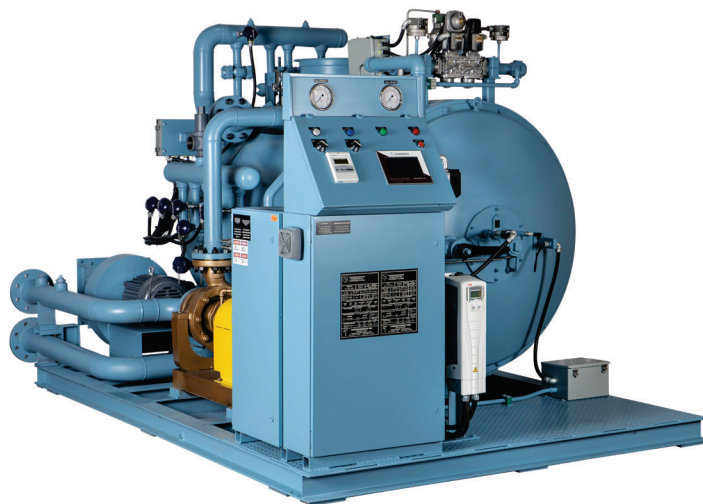

## DESIGN AND OPERATIONAL

- Redesigned low NOx burner with increased efficiency.
- PLC based panel complete with flame safeguard with linkageless control.
- Fully compatible with PLC based lead / lag control.
- Coil temperature system with individual temperature readouts and set points.

## STANDARD EQUIPMENT FEATURES

- Fully modulating burner with upto 10:1 turndown on Natural Gas, Number 2 Oil and Propane.
- NEMA 4 enclosures.

## OPTIONAL EQUIPMENT

- Air or Water Cooled Pumps
- Deaerator/Expansion Tanks
- Automatic Bypass Valves