

DESIGN DATA

CONTINUOUS CAPACITY DESIGN PRESSURE OPERATING PRESSURE FEEDWATER TEMERATURE HEATING SURFACE

5175 LBS/HR. FROM/AT 212°F 150 PSIG 5-140 PSIG 190° F 750 FT2 (ASME)

FULE REQUIREMENTS:

NATURAL GAS— SUPPLY PRESSURE CONSUMPTION NO.2 FUEL OIL

1 PSIG MAX. REGULATED 6100 SCFH 45 GPH


POWER REQUIREMENTS

240/480 VOLT 3 PHRASE 100/50 AMPS

SHIPPING WEIGHT 37,000 LBS. APPROX.

INSTALLATION: OUTDOOR SERVICE

PIPING & EQUIPMENT PLAN

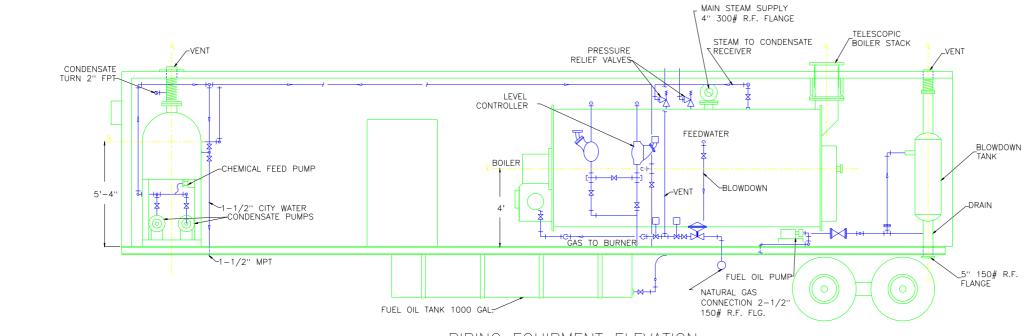

PIPING EQUIPMENT ELEVATION

Checked by Approved by — dat€ilename Scale Designed by Date 00000000 05/2002 N/A 150 H.P. TRAILER-MOUNTED BOILER SYSTEM-PIPING **WARE** EQUIPMENT ARRANGEMENT POWERFUL SOLUTIONS EXTRAORDINARY RESULTS. Edition Sheet 1058-D-02