



PLAN VIEW

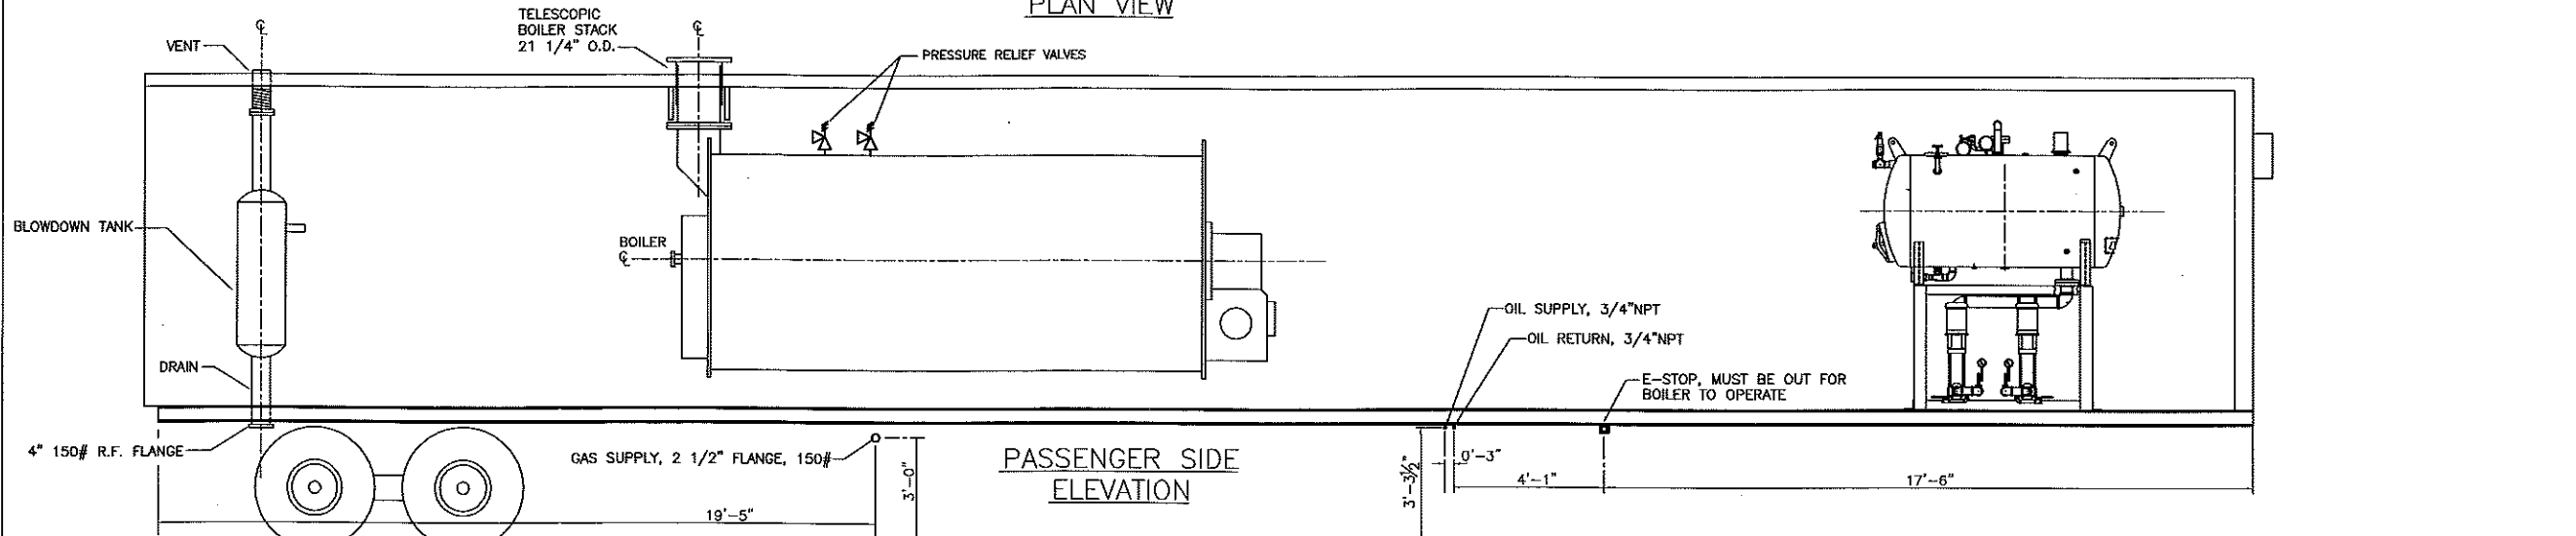

PASSENGER SIDE ELEVATION

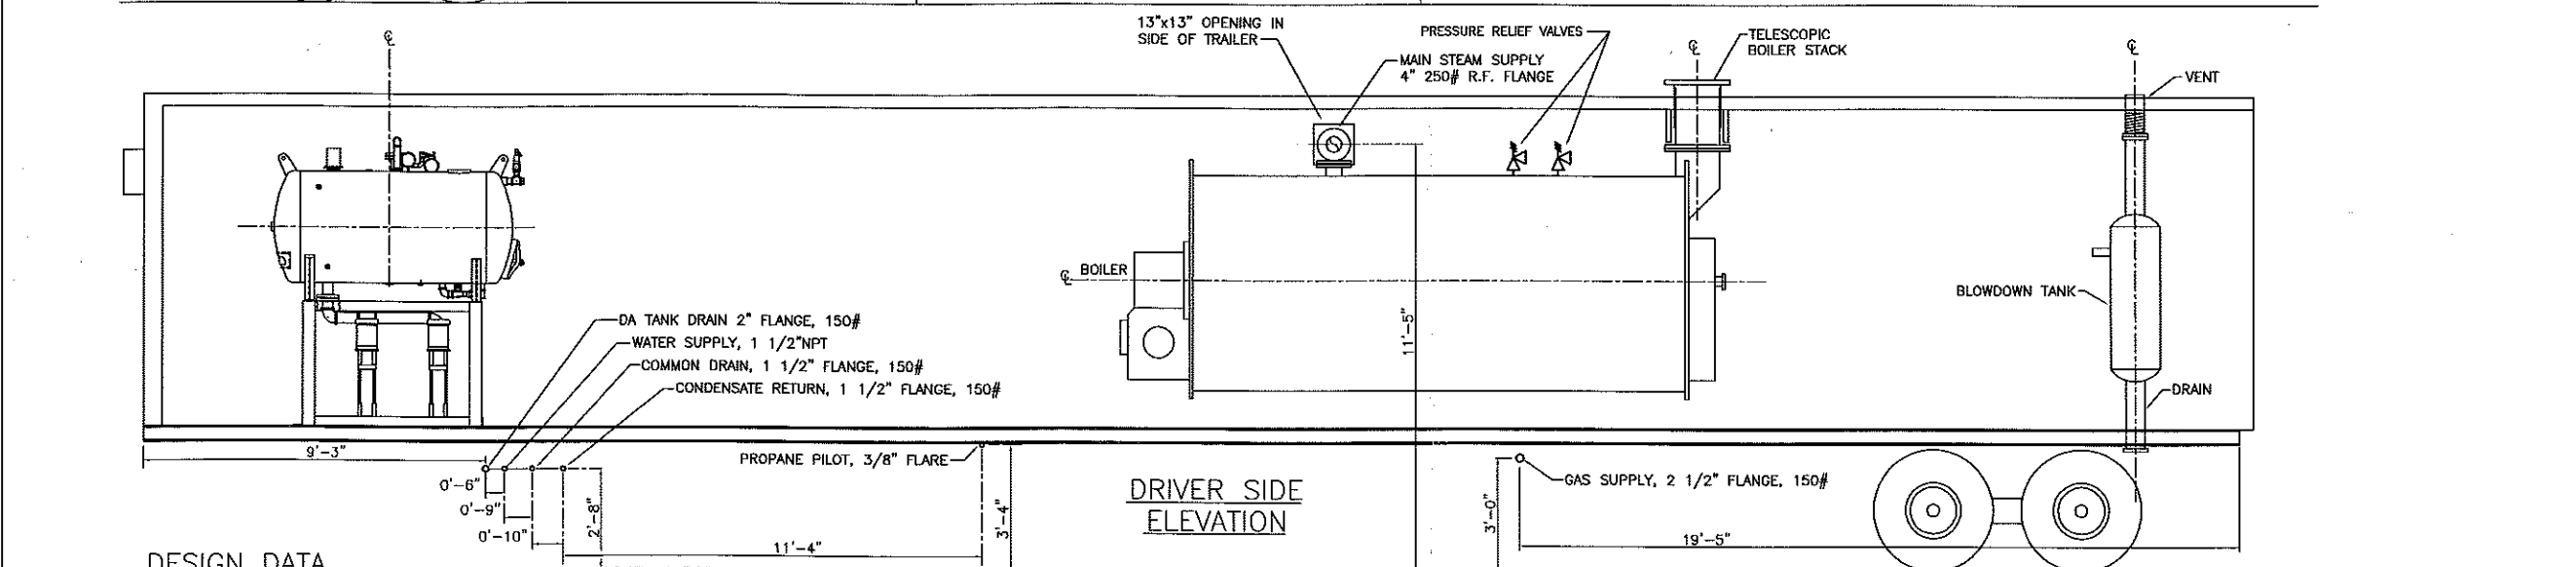

DRIVER SIDE ELEVATION

DESIGN DATA

CONTINUOUS CAPACITY 5175 LBS./HR. FROM/AT 212° F
 DESIGN PRESSURE 150 PSIG
 OPERATING PRESSURE 5-140 PSIG
 FEEDWATER TEMPERATURE 190° F
 HEATING SURFACE 765 FT² (ASME)

FUEL REQUIREMENTS:
 NATURAL GAS— SUPPLY PRESSURE 1 PSIG MAX. REGULATED
 CONSUMPTION 6100 SCFH
 NO.2 FUEL OIL 45 GPH

POWER REQUIREMENTS
 480 VOLT 3 PHASE 100 AMPS

SHIPPING WEIGHT
 37,000 LBS. APPROX.

INSTALLATION:
 OUTDOOR SERVICE

Designed by	Checked by	Approved by - date	Filename RB-748-122	Date 9/5/08	Scale WA
			150 H.P., TRAILER-MOUNTED, RB-748-122 BOILER SYSTEM-PIPING EQUIPMENT ARRANGEMENT		
			RB-748-122	Edition	Sheet